


2 Hob Portable Unit

CK226

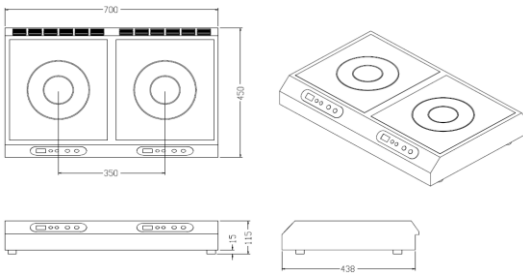

Specification

Electricity	CK226	220V, 60Hz, 1PH	Power Consumption	CK226	5200 W			
	CK226-A	208~240V, 50/60Hz, 1PH		CK226-A				
	CK226-E	220~240V, 50/60Hz, 1PH		CK226-E				
	CK226-J	200V, 50/60Hz, 1PH		CK226-J		4800 W		
Power Connection	2 separate plugs		Max Current	24 A (L:12A / R:12A)				
Conversion to Calory	4492.8 Kcal/h							
Warming	H1 ~ H7 (7 steps)			Heating	1 ~ 10 (10 steps)			
7 Warming Steps (H1-H7)	H1	H2	H3	H4	H5	H6	H7	(1L Water, using chafer)
	35℃	40℃	50℃	60℃	70℃	80℃	90℃	
Dimension / Weight	Product: 790 X 450 X 115 (mm) / 13kg Package: 770 X 520 X 210 (mm) / 15.5kg							
Controller Type	Capactive button (integrated into the unit)							
Cookware Diameter	min : Ø130mm max : Ø300mm		Loadable Weight	30 Kg				
Recommendation	Pasta, Egg station, Open kitchen							
Functions & Features	■ Safety							
	- No vessel : "00"							
	- Over current indication : "E1"							
	- Over voltage indication : "E2" (Above 265V)							
	- Low voltage : "E3" (Below 180V)							
	- Over heated product indication : "E4" (IGBT heat sink temperature above 85°C)							
- Top glass overheated (empty vessel) : "E6" (Top surface temperature above 260°C)								
- Unstable power indication: "E7"								
- Defective PCB indication : "E8"								
- Defective Working Coil indication : "E9"								
Warranty	1 year (to be charged in case of user's negligence)							

#503, Hanam Venture Center, Geomdansen-ro 239, Hanam-si, Gyeonggi-do, 13023 / Tel : +82-31-793-5895 / FAX : +82-31-793-5862

DIPO INDUCTION RANGE / www.dipoinduction.com

COPYRIGHT©2010 DIPO INDUCTION CO., LTD ALL RIGHTS RESERVED.